

SEYPOS®

Touch Scan Print

Monitor Táctil TM 515



Diseñado, desarrollado y construido para ofrecer las soluciones táctiles más rentables para una venta rápida en supermercados, bares, restaurantes, cafeterías....

Fiable, duradero y resistente a las salpicaduras de líquido con la firmeza justa de pantalla en el toque

SEYPOS®
Touch Scan Print

www.seypos.com
seypos@seypos.com

Monitor táctil

Especificaciones técnicas TM 515


Model	TM-515
Diagonal Size	15" 4:3
Touch Technology	5-wires Resistive Touch Panel, Life: 10 Million Touches
Touch Interface	Dual USB & RS232 Interface or Single USB Interface Option
OS Support	DOS, Windows 2000/XP/Vista/7 32&64-bit, Linux, iMac etc.
Useful Screen Area	304 mm (H) x 228 mm (V)
Monitor Dimensions (without stand)	360(L)×53(W)×303(H)(mm)
Native (optimal) Resolution	1024 X 768 @ 60 Hz
Colors	16.7 Million
Brightness(typical)	LCD Panel: 250 nits
Response Time - total (typical)	8 msec
Viewing Angle (typical)	Horizontal: ±80° or 160° Total
Contrast Ratio (typical)	600:1
On-screen Display (OSD)	Controls (front): Auto, -, +, Menu, Power Settings: Contrast, Brightness, H/V Position, RGB (color Temp), Clock, Phase, Recall Languages: English, German, Spanish, Japanese, French, Russian, Chinese
Input Video Signal Connector	D-sub 15-pin VGA Type
Power Supply	External Power Adaptor 50W; AC: 100~240V, 50/60Hz; DC: +12VDC, 4.16A
Power Consumption (typical)	<30 W
Mounting Appliaion	75 mm VESA Mount
Weight	N.W.:4.51Kg / G.W.:6.42Kg
Shipping Box Dimensions	440(L)×185(W)×425(H)(mm)
Other Features	Security Lock Receptacle
Temperature	Operating: 0°C To 40°C (32°F To 104°F), Storage: -20°C To 60°C (-4°F To 140°F)
Humidity(noncondensing)	Operating: 20%-80%, Storage: 10%-90%
Certificates	CE, FCC, RoHS
Options	Wall Mount Or Ceiling Mount Brackets



Adjustable



Stand

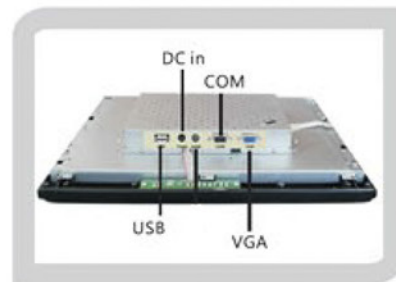

Interface

SEYPOS®

Touch Scan Print